



Meet Your Filtration Needs Is Our Goal.

SS-UE030-4333

UF Membrane for Pharmaceutical, Biological, Food and Dairy Applications

PRODUCT DESCRIPTION

Membrane Chemistry:	Proprietary semi-permeable polyethersulfone (PES)
Membrane MWCO:	30,000 Daltons
Construction:	Sanitary spiral wound element with net outer wrap
	Feed Spacer: F=31 mil, G=46 mil, H=65 mil
Options:	Outer wrap: N= Control Bypass without Tail T= Control Bypass with Tail

SPECIFICATIONS

Model	Active Membrane Area		
	FN/T Spacer (31mil)	GN/T Spacer (46mil)	HN/T Spacer (65mil)
	ft ² (m ²)	ft ² (m ²)	ft ² (m ²)
SS-UE030-4333	89 (8.2)	73 (6.7)	54 (5.0)

Replacements: NADIR DS-UH030-4333
Specialty feed spacer is available.

OPERATION SPECIFICATIONS


Typical Operation Pressure:	30-120 psi (2.1-8.3 bar)
Maximum Operation Pressure:	140 psi (9.7 bar)
Operating Temperature Range:	41-122°F (5-50°C)
Cleaning Temperature Range:	105-122°F (40-50°C)
pH-Continuous Operation @25°C	2.0-10.0
pH-CIP @25°C	1.8-11.0

Contact us for specific applications.

DESIGN PARAMETERS

Feed:	F spacer: 22-29 gpm G spacer: 29-36 gpm H spacer: 33-42 gpm
Design Pressure Drop Per Element:	F spacer: 12-15 psi (0.8-1.0bar) G spacer: 15-20 psi (1.0-1.4bar) H spacer: 15-25 psi (1.0-1.7bar)

DIMENSIONS

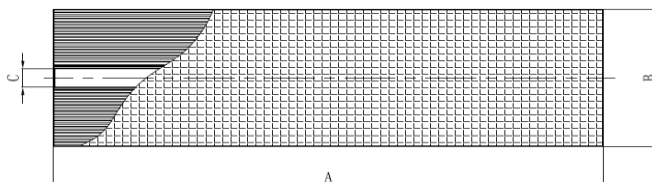

Model	A inches (mm)	B inches (mm)	C inches (mm)
SS-UE030-4333	33.0 (838)	4.3 (109)	0.831 (21.1)

RisingSun Membrane Technology (Beijing) Co., Ltd. www.risingsunmem.com

Add: Building 2, Shunren Road No.51, Linhe Industrial Zone, Shunyi District, Beijing, China Post Code: 101300

Tel: 86-10-89496869 Fax: 86-10-89496839 Mail: info@risingsunmem.com